




STEP SYSTEMS
DATA CENTER SOLUTIONS
& COOLING TECHNOLOGY



Agregaty chłodzenia oleju / Oil-Chiller
Seria INOI

Agregaty chłodzenia oleju serii INOI cechują się energooszczędnością i wysoką niezawodnością. Standardowo wyposażone są w parownik ze stali kwasoodpornej i czujniki niskiego i wysokiego ciśnienia w obwodzie chłodzenia. Agregaty chłodzenia oleju posiadają elektroniczny regulator temperatury ze stykiem alarmowym. Konstrukcja agregatu serii INOI compact pozwala na osiągnięcie dużej mocy chłodniczej w ograniczonej przestrzeni.

The oil cooler series INOI impresses with energy-efficient design and a high reliability. A plate evaporator out of inox and high and low-pressure switches on the cooling circuit are built in as standard. Additional the units are equipped with an electronic thermostat including an anomaly signal. The space-saving design of the series INOI allows it to place units with high cooling power on a small utility area.

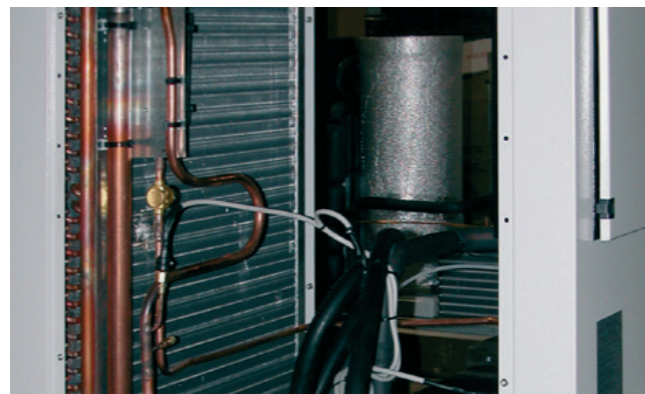

- Mała wymagana przestrzeń robocza
- Elektroniczny termostat ze stykiem sygnału alarmu
- Płytkowy parownik wykonany ze stali kwasoodpornej
- Czujnik niskiego i wysokiego ciśnienia
- Możliwość opcjonalnego zainstalowania pompy

- Small utility area
- Electronic thermostat including anomaly signal
- Plate evaporator made of inox
- High- and low-pressure switches
- Pump available as option

Seria INOI Series INOI Nr zamów./Order-No.	Typ Model	Tu Ta °C	Moc chłodnicza Cooling Power W (O30L32)	Napięcie Voltage V, Hz (standard)	V, Hz (optional)	Wymiary Dimensions B x H x T (mm)
20.INOI.0021.0121	FC-INOI-0021	45	2100	230, 1~, 50	400, 3~, 50	420 x 720 x 580
20.INOI.0034.0122	FC-INOI-0034	45	3400	400, 3~, 50	460, 3~, 60	570 x 1146 x 740
20.INOI.0043.0122	FC-INOI-0043	45	4300	400, 3~, 50	460, 3~, 60	570 x 1146 x 740
20.INOI.0058.0122	FC-INOI-0058	45	5800	400, 3~, 50	460, 3~, 60	570 x 1146 x 740
20.INOI.0070.0122	FC-INOI-0070	45	7000	400, 3~, 50	460, 3~, 60	570 x 1146 x 740
20.INOI.0100.0122	FC-INOI-0100	45	10000	400, 3~, 50	460, 3~, 60	735 x 1500 x 926
20.INOI.0130.0122	FC-INOI-0130	45	13000	400, 3~, 50	460, 3~, 60	735 x 1500 x 926
20.INOI.0160.0122	FC-INOI-0160	45	16000	400, 3~, 50	460, 3~, 60	735 x 1500 x 926

